Recap: basic data structures

Data Structures and Algorithms for Computational Linguistics III
ISCL-BA-07

Çağrı Çöltekin
ccoltekin@sfs.uni-tuebingen.de

University of Tübingen
Seminar für Sprachwissenschaft

Winter Semester 2026-2027

version: f7fc103+ @2026-10-21

Overview


- Some basic data structures
  - Arrays
  - Lists
  - Stacks
  - Queues
- Revisiting searching a sequence

Abstract data types and data structures

- An *abstract data type* (ADT), or abstract data structure, is an object with well-defined operations. For example a *stack* supports `push()` and `pop()` operations
- An abstract data type can be implemented using different *data structures*. For example a stack can be implemented using a linked list, or an array
- Sometimes the names and their usage are confusingly similar

Arrays

- An array is simply a contiguous sequence of objects with the same size
- Arrays are very close to how computers store data in their memory
- Arrays can also be multi-dimensional. For example, matrices can be represented with 2-dimensional arrays
- Arrays support fast access to their elements through indexing
- On the downside, resizing and inserting values in arbitrary locations are expensive

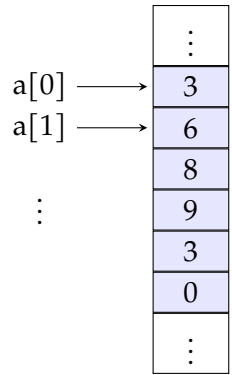


```
a = [3, 6, 8, 9, 3, 0]
```

Arrays
in Python

- No built-in array data structure in Python
- Lists are indexable
- For proper/faster arrays, use the `numpy` library


List indexing in Python

```
a = [3, 6, 8, 9, 3, 0]
a[0]    # 3
a[-1]   # 0
a[1:4] # [6, 8, 9]
a2d = [[3, 6, 8], [9, 3, 0]]
a2d[0][1] # 6
```

Lists

- Main operations for list ADT are
  - append (and prepend)
  - head (and tail)
- Lists are typically implemented using linked lists (but array-based lists are also common)






- Python lists are array-based


Stacks

- A stack is a last-in-first (LIFO) out data structure
- Two basic operations:
  - push
  - pop
- Stacks can be implemented using linked lists (or arrays)

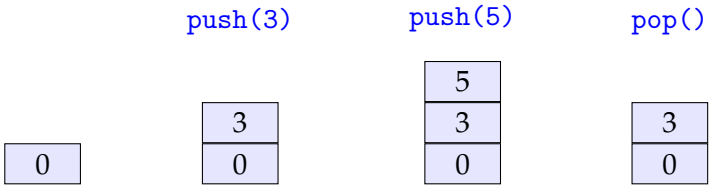

Queues

- A queue is a first-in-first (FIFO) out data structure
- Two basic operations:
  - enqueue
  - dequeue
- Queues can be implemented using linked lists (or maybe arrays)

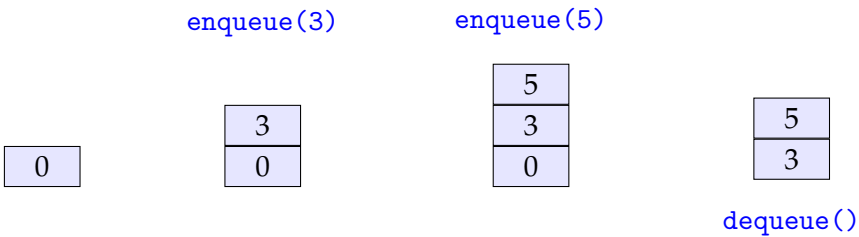

Other common ADT

- *Strings* are often implemented based on character arrays
- *Maps* or *dictionaries* are similar to arrays and lists, but allow indexing with (almost) arbitrary data types
  - Maps are generally implemented using hashing (later in this course)
- Sets implement the mathematical (finite) sets: a collection unique elements without order
- Trees are used in many algorithms we discuss later (we will revisit trees as data structures)

Studying algorithms

- In this course we will study a series of important algorithms, including
  - Sorting
  - Pattern matching
  - Graph traversal
- For any algorithm we design/use, there are a number of desirable properties

Correctness	an algorithm should do what it is supposed to do
Robustness	an algorithms should (correctly) handle all possible inputs it may receive
Efficiency	an algorithm should be light on resource usage
Simplicity	an algorithm should be as simple as possible

  - ...
- We will briefly touch upon a few of these issues with a simple case study

A simple problem: searching a sequence for a value

```
1 def linear_search(seq, val):
2     answer = None
3     for i in range(len(seq)):
4         if seq[i] == val:
5             answer = i
6     return answer
```

Is this a good algorithm? Can we improve it?

Linear search: take 2

```
1 def linear_search(seq, val):
2     for i in range(len(seq)):
3         if seq[i] == val:
4             return i
5     return None
```

Can we do even better?

Linear search: take 3

```
1  def linear_search(seq, val):
2      n = len(seq) - 1
3      last = seq[n]
4      seq[n] = val
5      i = 0
6      while seq[i] != val:
7          i += 1
8      seq[n] = last
9      if i < n  or seq[n] == val:
10       return i
11     else:
12       return None
```

- Is this better?
- Any disadvantages?
- Can we do even better?

Binary search

```
1  def binary_search(seq, val):
2      left, right = 0, len(seq)
3      while left <= right:
4          mid = (left + right) // 2
5          if seq[mid] == val:
6              return mid
7          if seq[mid] > val:
8            right = mid - 1
9          else:
10           left = mid + 1
11     return None
```

- We can do (much) better if the sequence is sorted.

Binary search

recursive version

```
1  def binary_search_recursive(seq, val, left=None, right=None):
2      if left is None:
3          left = 0
4      if right is None:
5          right = len(seq)
6      if left > right:
7        return None
8      mid = (left + right) // 2
9      if seq[mid] == val:
10         return mid
11     if seq[mid] > val:
12       return binary_search_recursive(seq, val, left, mid - 1)
13     else:
14       return binary_search_recursive(seq, val, mid + 1, right)
```

A note on recursion

- Some problems are much easier to solve recursively
- Recursion is also a mathematical concept, properties of recursive algorithms are often easier to prove
- Reminder:
  - You have to define one or more *base case*s (e.g., `if left > right` for binary search)
  - Each recursive step should approach the base case (e.g., should run on a smaller portion of the data)
- We will see quite a few recursive algorithms, it is time for getting used to if you are not

A note on recursion

- Some problems are much easier to solve recursively
- Recursion is also a mathematical concept, properties of recursive algorithms are often easier to prove
- Reminder:
  - You have to define one or more *base case*s (e.g., `if left > right` for binary search)
  - Each recursive step should approach the base case (e.g., should run on a smaller portion of the data)
- We will see quite a few recursive algorithms, it is time for getting used to if you are not

Exercise: write a recursive function for linear search.

Exercise: write a recursive function for semgentation.

(for home)

- We want to enumarate (e.g., print) all possible segmentations of a given string
- For example, for `abcd`, we have
  '`abcd`' '`a-bcd`' '`ab-cd`' '`abc-d`' '`a-b-cd`' '`a-bc-d`' '`ab-c-d`' '`a-b-c-d`'
- How many possible segmentations are there for a string of size n?
- How to formulate the problem recursively?
- How to formulate the problem iteratively?

Summary

- This lecture is a review of some basic data structure and algorithms
- We will assume you know these concepts, please revise your earlier knowledge if needed

Summary

- This lecture is a review of some basic data structure and algorithms
- We will assume you know these concepts, please revise your earlier knowledge if needed

Next:

- Analysis of algorithms (Reading: textbook (Goodrich, Tamassia, and Goldwasser, 2013) chapter 3)
- A few common patterns for designing (efficient) algorithms

Another exercise

- Implement the abstract data types of stack and queue using
  - a list
  - an array

  as underlying data structure
- How do you do this in Python (where lists are actually arrays)?
- Which one is more efficient?
- Possible extension, implement a real singly-linked list structure in Python, repeat the above comparisons

An interesting historical anecdote

How difficult is the ‘binary search’?

An interesting historical anecdote

How difficult is the 'binary search'?

1946 suggested in a lecture by John Mauchly
1960 first fix to the original version (by Derrick Henry Lehmer)
1962 another fix/improvement was published (by Hermann Bottenbruch)
2006 a bug was discovered in Java's binary search implementation

An interesting historical anecdote

How difficult is the 'binary search'?

1946 suggested in a lecture by John Mauchly
1960 first fix to the original version (by Derrick Henry Lehmer)
1962 another fix/improvement was published (by Hermann Bottenbruch)
2006 a bug was discovered in Java's binary search implementation

> Although the basic idea of binary search is comparatively straightforward, the details can be surprisingly tricky. —Knuth (1973)

Acknowledgments, credits, references

- The historical information on binary search development on Slide A.2 is from Wikipedia


Goodrich, Michael T., Roberto Tamassia, and Michael H. Goldwasser (2013). *Data Structures and Algorithms in Python*. John Wiley & Sons, Incorporated. ISBN: 9781118476734.


Knuth, Donald E. (1973). *The Art of Computer Programming: Sorting and Searching*. Vol. 3. Pearson Education. ISBN: 9780321635785.